

PS Model

Economical waste water treatment tank

Economical toilet waste water treatment tank fits with continuous flow waste water divided into one septic chamber and bio filter chamber.

- Easy installation
- Low maintenance cost
- Good for continuous waste water flow rate
- Economical price
- For toilet waste water



Tank specifications

				Width 1.40 Height 1.50				Width 1.60 Height 1.71				Width 1.80 Height 1.93			
	Users	Q		Model	V	L	MV	Model	V	L	MV	Model	V	L	MV
	Toilets	Total	m ³ /D		m ³	m	m ³		m ³	m	m ³		m ³	m	m ³
○	16	4	0.80	PS-1250	1.25	1.40	0.25								
○	20	5	1.00	PS-1600	1.60	1.70	0.30								
○	24	6	1.20					PS-1900	1.90	1.60	0.35				
○	31	7	1.56					PS-2340	2.34	1.82	0.45				
○	45	11	2.25									PS-3440	3.44	2.05	0.65
○	58	14	2.90									PS-4450	4.45	2.37	0.85
○	72	18	3.60									PS-5460	5.46	2.80	1.05
★	86	21	4.30									PS-6470	6.47	3.22	1.25
★	100	25	5.00									PS-7500	7.48	3.64	1.50
★	112	28	5.60									PS-8500	8.49	4.07	1.60
★	126	31	6.30									PS-9500	9.50	4.49	1.80
★	140	35	7.00									PS-10500	10.51	4.91	2.00
★	152	38	7.60									PS-11500	11.52	5.34	2.20
★	166	41	8.30									PS-12500	12.53	5.76	2.40
★	180	45	9.00									PS-13500	13.54	6.18	2.60
★	194	48	9.70									PS-14500	14.54	6.60	2.80
★	206	51	10.30									PS-15500	15.55	7.03	3.00


Inlet and outlet pipes : ○ 4" diameter ★ 6" diameter

PS Model

ถังบำบัดน้ำเสียแบบประหยัด

ถังบำบัดน้ำเสียรุ่นประหยัด เหมาะสำหรับน้ำเสียที่มีการไหลสม่ำเสมอ แบ่งถังเป็นสองส่วน คือ ส่วนเก็บกัก (Septic) และส่วนกรองชีวภาพแบบไร้อากาศ (Anaerobic Bio Filter)

- สามารถติดตั้งได้ง่าย
- ค่าบำรุงรักษาต่ำ
- เหมาะสำหรับน้ำเสียที่ไหลสม่ำเสมอ
- ราคาประหยัด
- เหมาะสำหรับน้ำเสียจากส้วม

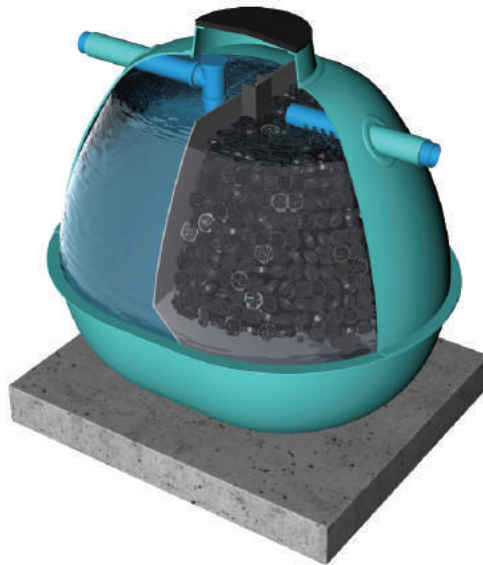

Tank schematic

